


# GAMA T78 B R A G A

<b>Uw</b>	0.81 W/m <sup>2</sup> *K**
<b>Rw</b>	35 dB**
<b>Pane</b>	2-3 glass unit
<b>Warranty</b>	5 years.*

#### Window profile characteristics:

- Sliding doors
- Arched windows

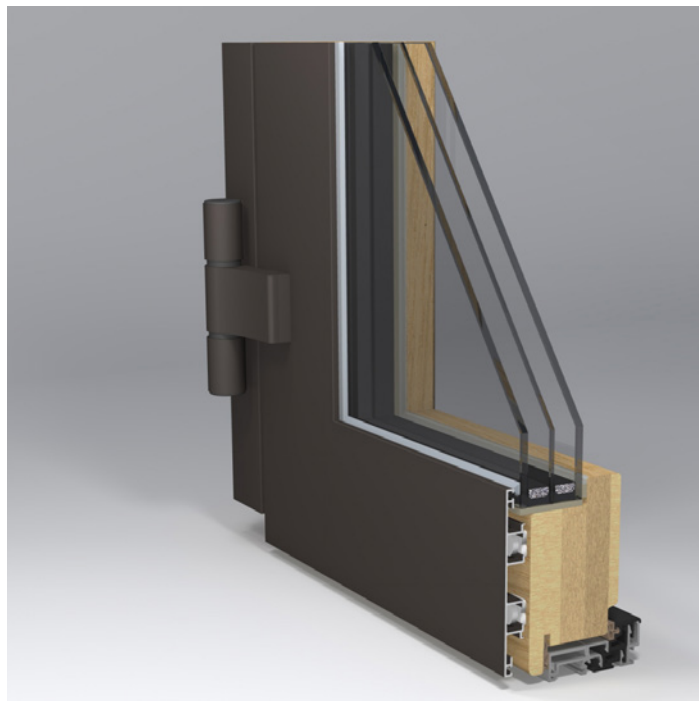

## For Modern Style Houses

External doors of extraordinary design for modern architecture. The door leaf and frame are in one place on the outside. We can also provide arched exterior doors and windows as well as sliding doors of similar design. The elements of this system can be integrated very well in wooden and glass façade systems. Glass Unit: up to 62mm.

### MATERIAL USED

<b>Types of wood:</b>	tenon pine, non-tenon pine, meranti, larch, oak, etc.
<b>Painting:</b>	Teknos/Finland/
<b>Aluminium profiles:</b>	Gutmann/Germany/
<b>Furniture:</b>	Roto/Germany/ G. U./Germany/
<b>Glasses:</b>	Saint-Gobain/France/
<b>Gaskets:</b>	Schlegel Q-Lon/Germany/
<b>Handles:</b>	Hoppe Atlanta/Germany/



\* The warranty for window outdoor topping is provided subject to the type of wood and painting.

\*\* Uw and Rw calculated for a window:

Measurements: height 1480 mm, width 1230 mm. Type of opening: internal opening, right. Bindings: ROTO. Fastening: 7 fixing points in perimeter. Gaskets: SCHLEGEL foam. Sealing sets: 2. Pane: glass unit, 4-14Ar-4-14Ar-4 (two glasses covered with low-e coating, openings filled with argon gas, spacers - Swispacer Ultimate).